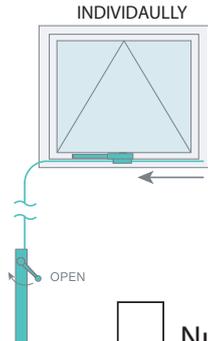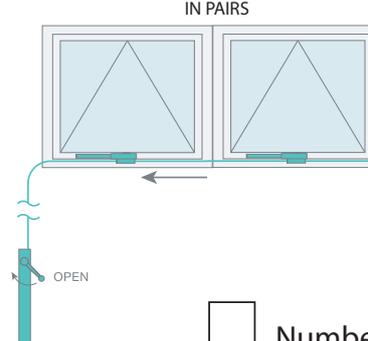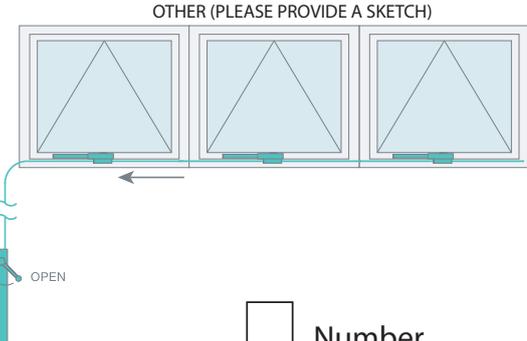# Strand Manual

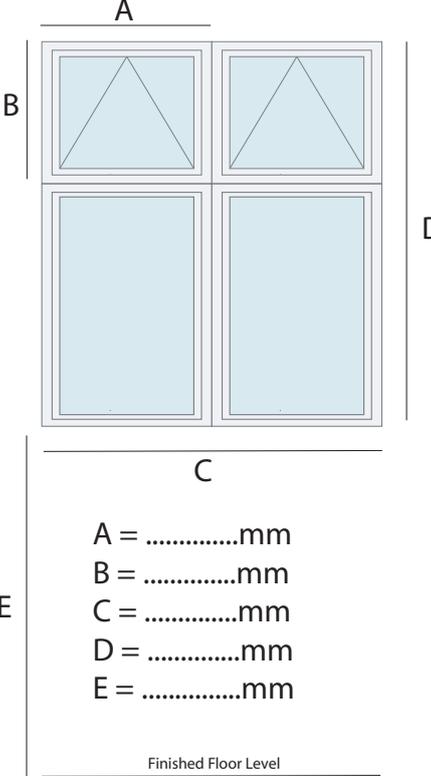## Before ordering we need to know the following

Please fill in all the relevent details below as ccurately as possible to ensure we specify the correct items, unless stated otherwise we will assume operating handle can be located 300mm from cill

1. Number of windows to be operated?

INDIVIDAULLY   IN PAIRS   OTHER (PLEASE PROVIDE A SKETCH)

OPEN   ☐ Number

OPEN   ☐ Number

OPEN   ☐ Number

2. Window size?

A

B

D

C

E

A = ...mm
B = ...mm
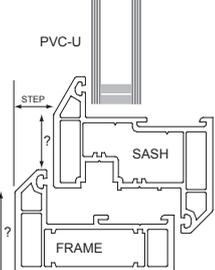C = ...mm
D = ...mm
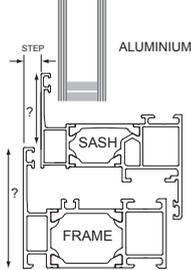E = ...mm

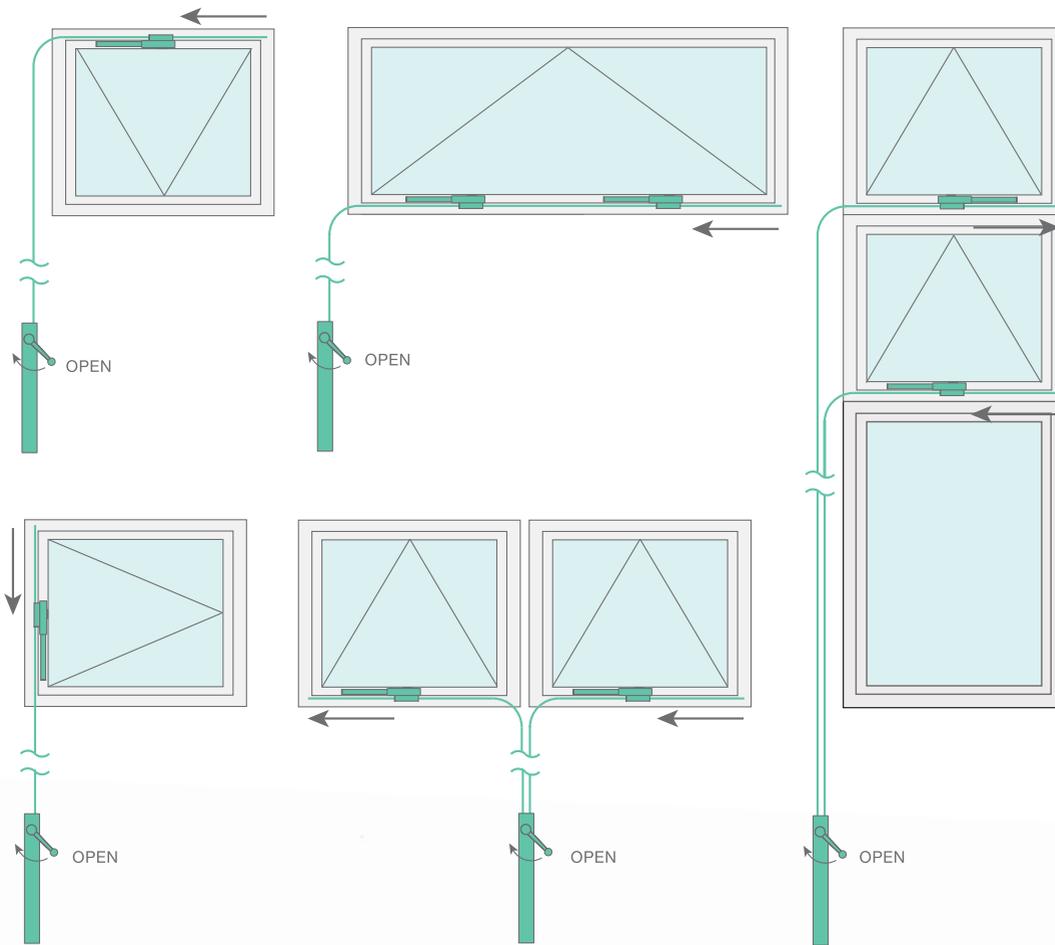Finished Floor Level

3. Window Style?

Side hung open out ☐

Horizontal pivot window ☐

Vertical pivot window ☐

Top hung open out ☐

Bottom hung open in ☐

For safety reasons we recommend fitting side support stays to all bottom-hung windows. Please note for bottom hung opening in windows a minimmum of 50mm of frame above the window is required to mount the chain opener.

4. How does the window open?
Inwards ☐   Outwards ☐

5. Window position?
Vertical ☐   In a pitch ☐

6. Window Material?
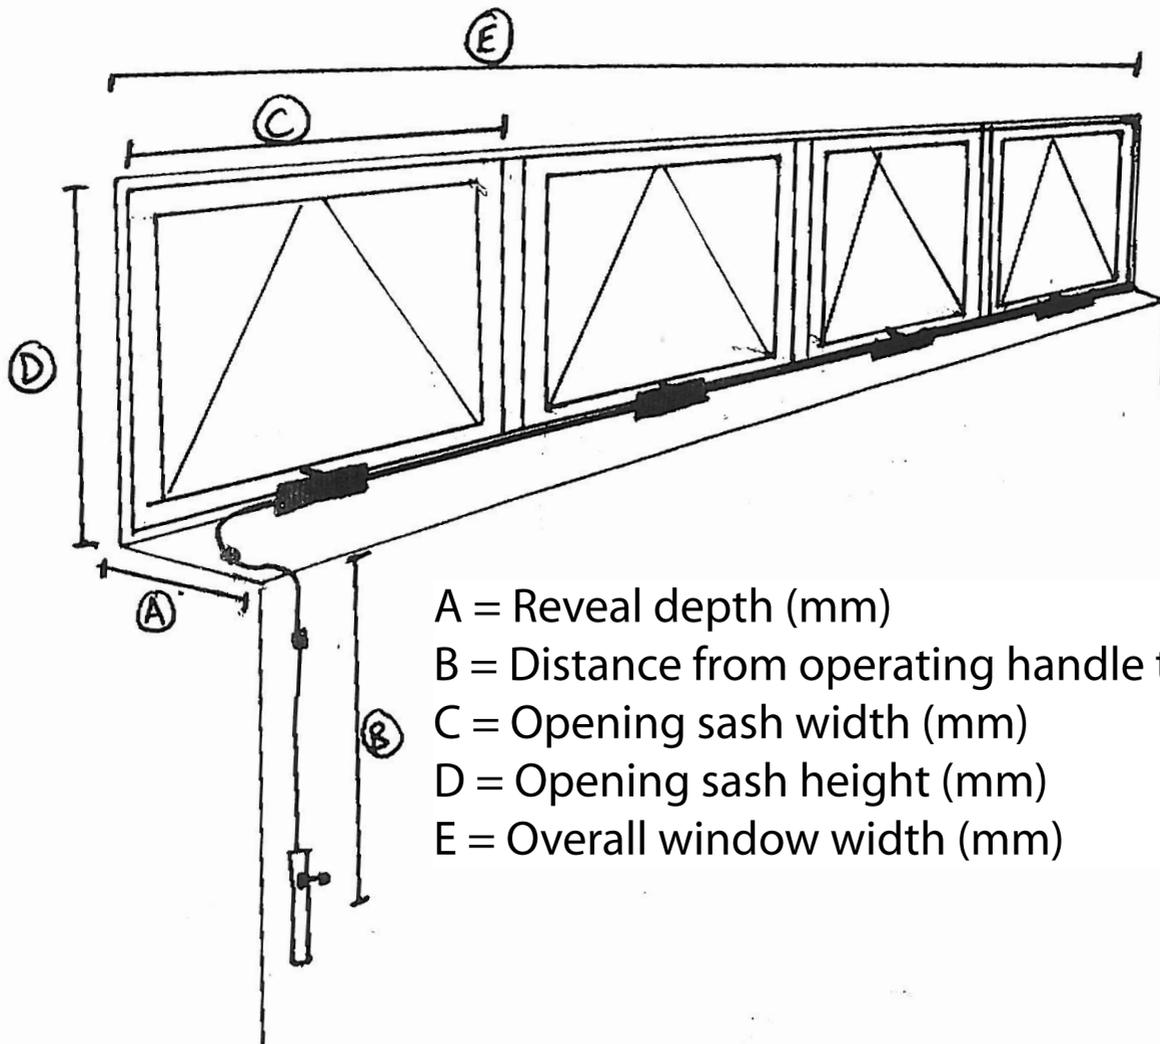Timber ☐   PVC-U ☐   Aluminium ☐

7. Sash & Frame Details with Dimmensions

TIMBER
SASH
FRAME

PVC-U
STEP
SASH
FRAME

ALUMINIUM
STEP
SASH
FRAME

Other Installation Examples

Example of required sketch

A = Reveal depth (mm)

B = Distance from operating handle to cill (mm)

C = Opening sash width (mm)

D = Opening sash height (mm)

E = Overall window width (mm)